

SPECIFICATIONS

Abmessungen	Metrisch	Britisch
Max. Arbeitshöhe A	9.50m	31ft 2in
Max. Bühnenhöhe B	7.50m	24ft 7in
Gesamtlänge C	1.30m	4ft 3in
Gesamtbreite D	0.75m	2ft 6in
Gesamthöhe E	1.99m	6ft 6in
Ausleger-Bodenfläche(Länge F × Breite G)	1.70m/1.86m	5ft 7in/6ft 1in
Bühnengröße(Länge×Breite)	0.70m×0.60m	2ft 4in×2ft
Bodenfreiheit	0.055m	2in
Reifen(vorne)	0.20m	8in
Reifen(hinten)	0.13m	5in




Leistung		
Zulässige Belastung	150kg	330lb
Max. Personen auf der Bühne	1	1
Geschwindigkeit Anheben/Absenken	28/18sec	28/18sec

Gewicht		
Gewicht - AC	430kg	947lb
Gewicht - DC	453kg	998lb

Antrieb		
Batterie	12V/85Ah	12V/85Ah
Ladegerät	12V/15A	12V/15A
Hubmotor - AC	220VAC/1.5kW	220VAC/1.5kW
Hubmotor - DC	12VDC/1.5kW	12VDC/1.5kW



Elektrisch

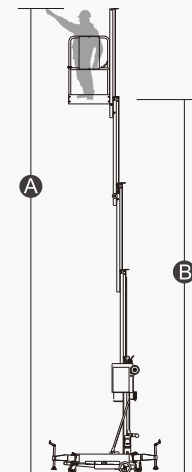

EIGENSCHAFTEN

Standardpunkte

- Selbstsperrendes Tor auf der Bühne
- Notabsenksystem
- Zylinder-Halteventil
- Alarm für alle Bewegungen
- Ladeanzeige(Gleichstromtyp)
- Ladungsschutzsystem(Gleichstromtyp)
- Blinkende LED-Kennleuchte
- Anschlagpunkt für Sicherungsseil
- Verzur-und Hebeunkte
- Not-Aus-Taste



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://www.cndingli.com>

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2023-08

