


SPECIFICATIONS

Size	Metric	British
Max. Working Height(Indoor)	10.00m	32.8 ft
Max. Working Height(Outdoor)	8.10m	26.6 ft
Max. Platform Height(Indoor)	8.00m	26.2 ft
Max. Platform Height(Outdoor)	6.10m	20.0 ft
Overall Length G	2.48m	97.6 in
Overall Width ①	0.83m	32.7 in
Overall Height(Rails Up)	2.36m	92.9 in
Overall Height(Rails Down)	2.00m	78.7 in
Platform Size(Length×Width)	2.27m×0.81m	89.4×31.9 in
Platform Extension Size 6	0.90m	35.4 in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	3.9 in/0.7 in
Wheelbase (1.87m	73.6 in
Turning Radius(Inside/Outside)	0m/2.10m	0in/82.7 in
Tyres	φ381×127mm	φ15×5 in

Performance		
S.W.L	227kg	500lb
S.W.L On Extension	113kg	250lb
Max. Occupants(Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.2mph
Travel Speed(Raised)	0.8km/h	0.5mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	30/34sec	30/34sec

Weight			
Overall Weight	2190kg	4818lb	

20L	5.3gal
24V/185Ah	24V/185Ah
24V/30A	24V/30A
15VAC/3.5kW	15VAC/3.5kW
	24V/185Ah 24V/30A

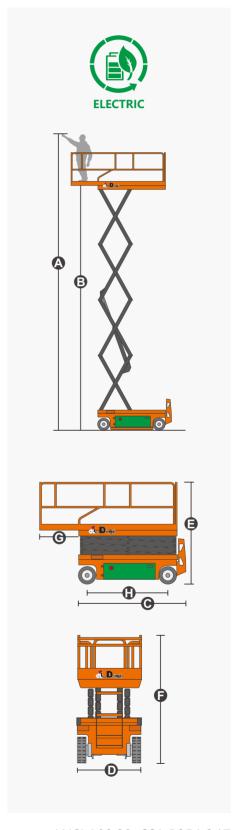

ANSI A92.20, CSA B354.6.17





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- · Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- · Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com









