

JCPT2223DC




SPECIFICATIONS

Size	Metric	British
Max. Working Height(Inside)	22.00m	72ft 2in
Max. Working Height(Outside)	22.00m	72ft 2in
Max. Platform Height(Inside)	20.00m	65ft 7in
Max. Platform Height(Outside)	20.00m	65ft 7in
Overall Length ©	4.95m	16ft 3in
Overall Width (2.46m	8ft 1in
Overall Height(Rails Up)	3.86m	12ft 8in
Overall Height(Rails Down)	3.00m	9ft 10in
Platform Size(Length×Width)	4.59m×2.25m	15ft 1in × 7ft 5in
Platform Extension Size G	2.70m	8ft 10in
Ground Clearance	0.40m	1ft 4in
Wheelbase (1)	3.30m	10ft 10in
Turning Radius(Inside/Outside)	1.25m/3.40m	4ft 1in/11ft 2in
Tyres	36×14-20	36×14-20

Performance		
S.W.L	750kg	1653lb
S.W.L On Extension	750kg	1653lb
Max. Occupants(Inside/Outside)	4/4	4/4
Gradeability	30%	30%
Travel Speed(Stowed)	5.0km/h	3.10mph
Travel Speed(Raised)	0.4km/h	0.25mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	90/75sec	90/75sec

Weight			
Overall Weight	13400kg	29541lb	

Power		
Hydraulic Tank	150L	40gal
Battery	48V/630Ah	48V/630Ah
Charger	48V/60A	48V/60A
Driving Motor	4×32VAC/3.3kW	4×32VAC/3.3kW
Lifting Motor	2×48VDC/10.0kW	2×48VDC/10.0kW

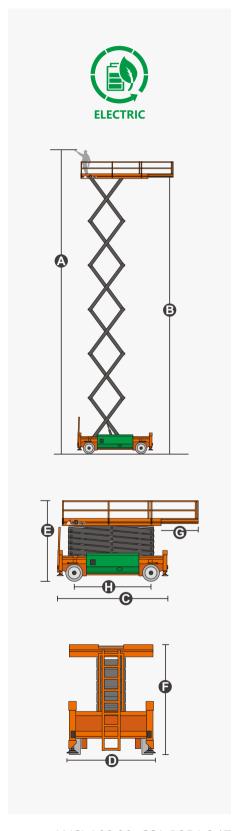

ANSI A92.20, CSA B354.6.17







FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Automatic One-Way Platform Extension Deck
- Four-Wheel Drive
- · Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- · Drivable At Full Height



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











