JCPT2825DC






SPECIFICATIONS

Metric	British
28.00m	91ft 10in
28.00m	91ft 10in
26.00m	85ft 4in
26.00m	85ft 4in
5.96m	19ft 7in
2.50m	8ft 2in
4.13m	13ft 7in
3.19m	10ft 6in
5.48m×2.45m	18ft ×8ft
2.10m	6ft 11in
0.23m	9in
4.10m	13ft 5in
3.50m/6.00m	11ft 6in/19ft 8in
355/55D625	355/55D625
	28.00m 28.00m 26.00m 26.00m 5.96m 2.50m 4.13m 3.19m 5.48m×2.45m 2.10m 0.23m 4.10m 3.50m/6.00m

Performance		
S.W.L	1000kg	2204lb
S.W.L On Extension	1000kg	2204lb
Max. Occupants(Inside/Outside)	4/4	4/4
Gradeability	30%	30%
Travel Speed(Stowed)	3.5km/h	2.17mph
Travel Speed(Raised)	0.3km/h	0.19mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	130/100sec	130/100sec

Weight			
Overall Weight	19750kg	43541lb	

Power		
Hydraulic Tank	260L	69gal
Lithium Battery	80V/520Ah	80V/520Ah
Charger	80V/80A	80V/80A
Driving Motor	4×53VAC/2kW	4×53VAC/2kW
Lifting Motor	53VAC/28kW	53VAC/28kW

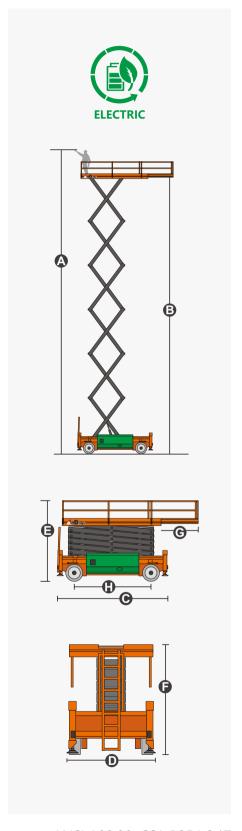

ANSI A92.20, CSA B354.6.17







FEATURES

Standard Items

- Proportional Joystick Controls
- · Self-Locking Gates
- Automatic One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











