


SPECIFICATIONS

Size	Metric	British
Max. Working Height(Inside) A	28.00m	91ft 10in
Max. Working Height(Outside)	28.00m	91ft 10in
Max. Platform Height(Inside) B	26.00m	85ft 4in
Max. Platform Height(Outside)	26.00m	85ft 4in
Overall Length C	5.96m	19ft 7in
Overall Width D	2.50m	8ft 2in
Overall Height(Rails Up) E	4.13m	13ft 7in
Overall Height(Rails Down) F	3.19m	10ft 6in
Platform Size(Length×Width)	5.48m×2.45m	18ft ×8ft
Platform Extension Size G	2.10m	6ft 11in
Ground Clearance	0.23m	9in
Wheelbase H	4.10m	13ft 5in
Turning Radius(Inside/Outside)	3.50m/6.00m	11ft 6in/19ft 8in
Tyres	355/55D625	355/55D625

Performance		
S.W.L	1000kg	2204lb
S.W.L On Extension	1000kg	2204lb
Max. Occupants(Inside/Outside)	4/4	4/4
Gradeability	40%	40%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.3km/h	0.19mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	110/100sec	110/100sec

Weight		
Overall Weight	19800kg	43651lb

Power		
Diesel Engine	55kW/2600rpm	55kW/2600rpm
Diesel Tank	130L	34gal
Hydraulic Tank	260L	69gal

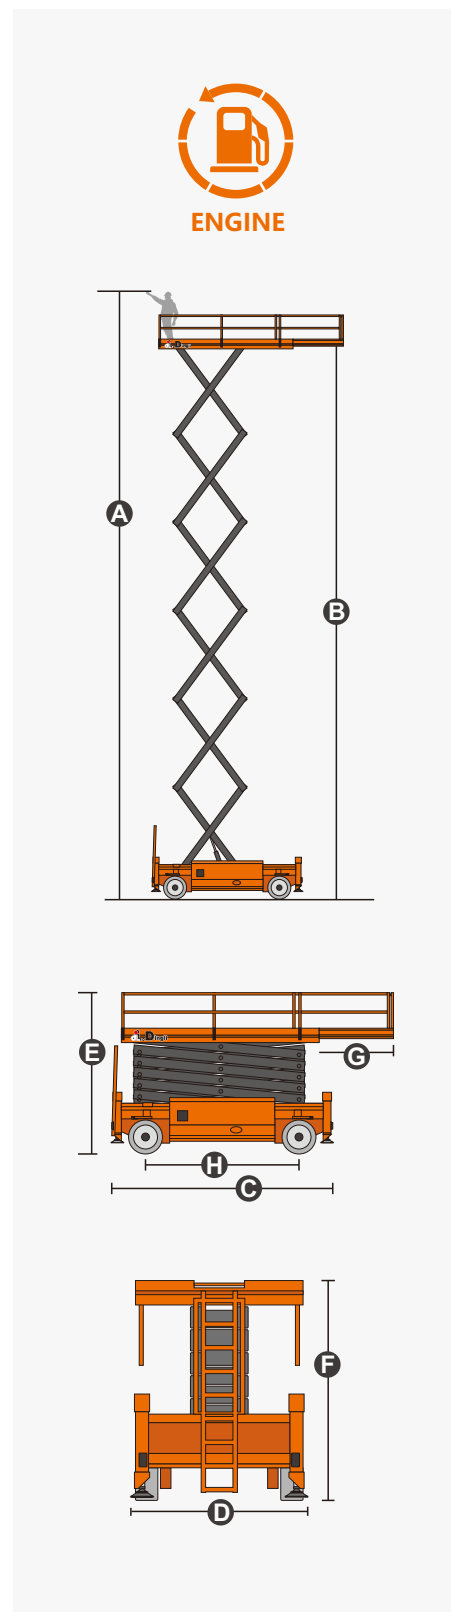

ANSI A92.20, CSA B354.6.17

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Automatic One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2022-09

